


S-Type load cell S21S



Features

- ▶ Material: Nickel plated alloy steel construction
- ▶ Capacity: 2.000 - 5.000 kg
- ▶ Protection class: IP 66
- ▶ Design: The measuring element is hermetically sealed and laser-welded
- ▶ Robust design for harsh industrial environment
- ▶ Particularly robust for heavy duty industrial use

Scope of application:

- ▶ Train scales,
- ▶ hybrid scales conversion,
- ▶ tank weighing,
- ▶ dosing, crane scales,
- ▶ BIG-BAG scales,
- ▶ suspended hopper scales,
- ▶ filling and mixing systems.
- ▶ As force absorber (calibrated in Newton)



S-Type load cell S21S

Load cell for measuring tensile and compressive forces

The S-shaped S21S load cell was specially designed for measuring tensile and compressive forces. A centric thread in the upper and lower part of the load cell ensures optimal force application in tension and compression direction. The load cells are made of high-alloy tool steel and are characterised by high accuracy and linearity.


The S21S load cells deliver extremely precise and

reproducible measurement results even in long-term use in harsh industrial environments. The load cell is laser-welded and meets the requirements of protection class IP66. Due to simple integration possibilities and good dynamic behaviour, these load cells are often offered as force transducers and calibrated in Newton.


TECHNICAL DETAILS

Accuracy class according to OIML R 60:		0,03
Nominal load (E_{max})	kg	2.000, 5.000
Number of division values (n_{LC})		3000
Nominal value (C_n) / Characteristic tolerance	mV/V	$2,0 \pm 0,003$
Minimum preload (E_{min})		0
Limit load (EL)	% from E_{max}	120
Breaking load (Ed)		200
Recommended supply voltage (Uref)	V	5 - 12
Maximum permissible supply voltage (BU)		15
Zero adjustment	% v. C_n	$\leq \pm 1$
Input resistance (RLC) at reference temperature	Ω	400 ± 10
Output resistance (RO) at reference temperature	Ω	352 ± 2
Insulation resistance	M Ω	$> 5\,000$
Nominal temperature range (BT)	$^{\circ}\text{C}$	- 10 ... + 40
Protection class according to (DIN 40.050 / EN 60529)		IP 66
Cable length		2,6 m
Material		Alloy steel

TECHNICAL DRAWINGS

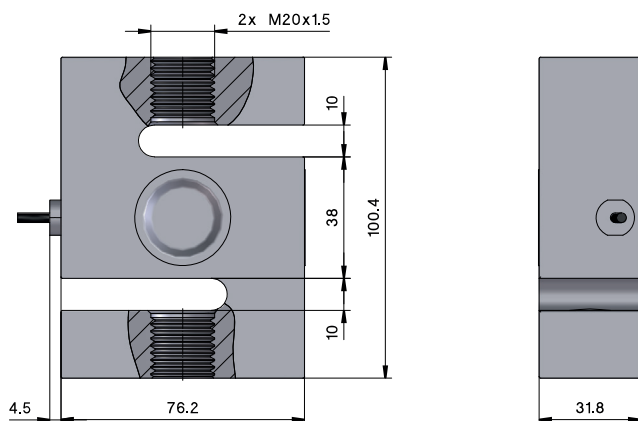

Einbaubeispiel

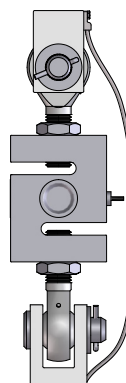

Elektrischer Anschluss

