BOSCHE
WEIGHING SYSTEMS

Platform scale *TP E*

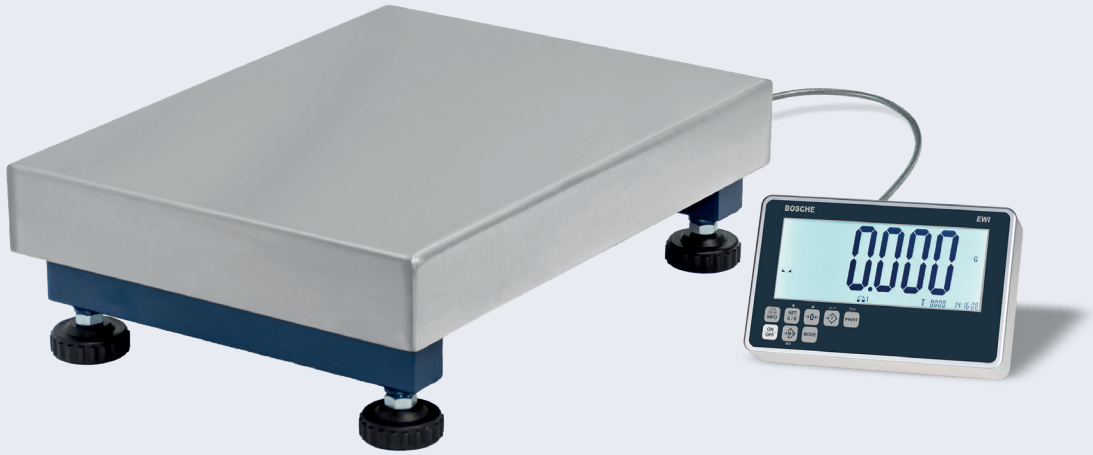





Functions & features

- Verifiable version to accuracy class III
- Stainless steel platform sizes:
  300 x 400 | 400 x 400 | 400 x 500 | 500 x 600 | 600 x 600 | 600 x 800 mm
- Weighing capacities: 30 kg / 60 kg / 150 kg / 300 kg
- Maintenance-free, wear-free weighing technology
- EWI-T (verifiable) and GTE-T (non-verifiable) weighing indicators in aluminium housings
- Adjustable backlighting
- Large backlit 60 mm LCD display with 50 mm-high digits
- Alibi memory with time and date
- Simple, user-friendly operation
- Optional 400 or 600 mm-high stand to raise the weighing indicator
- Higher accuracy available on request

- Installation

  Four rubber feet ensure safe, stable positioning of the platform scale. Adjustable levelling feet and a spirit level help align the scale. It is ready for use as soon as it has been installed.
  An optional transport trolley is available for the platform scale.

+49 (0) 5491.999.689.0
www.bosche.eu

BOSCHE
WEIGHING SYSTEMS

Platform scale *TP E*

The economical Basic TP-E digital platform scale is designed for daily use in industry and commerce. Its detachable weighing indicator makes it easy to weigh small or large parcels, components and bulky items within the rated capacity.
The weighing platform and basic weighing indicator are designed for simple weighing in verifiable (EWI indicator) and non-verifiable (GTE-T indicator) applications.
The convenient keys make the scale easy to operate, even for untrained staff.

Its lightweight design and optional transport trolley also allow mobile use.

Construction
The weighing plate is made of stainless steel, with a robust base of high-quality die-cast aluminium. The load is transferred directly to a high-quality strain gauge load cell.

Increased load-bearing capacity and rigidity extend the life of the platform scale.

The weighing platform is connected to the indicator by a 1.8 m cable.

Power supply and interfaces
The platform scale is supplied for mains operation as standard (mains plug included). The optional rechargeable battery allows weighing without a mains supply.
The serial RS 232 data interface allows bidirectional transfer of weight data to a PC, printer or remote display.

Data cables, an external remote display and a printer are available as accessories.

Accessories

Item	Description
Stand	Stainless steel stand to raise the weighing indicator
Battery	Internal rechargeable battery with up to 15 hours of operation
E 50	Verification charge up to 50 kg
E 350	Verification charge up to 350 kg
Second RS 232 data interface	Serial interface for transmitting measurement data to a printer, PC, etc.

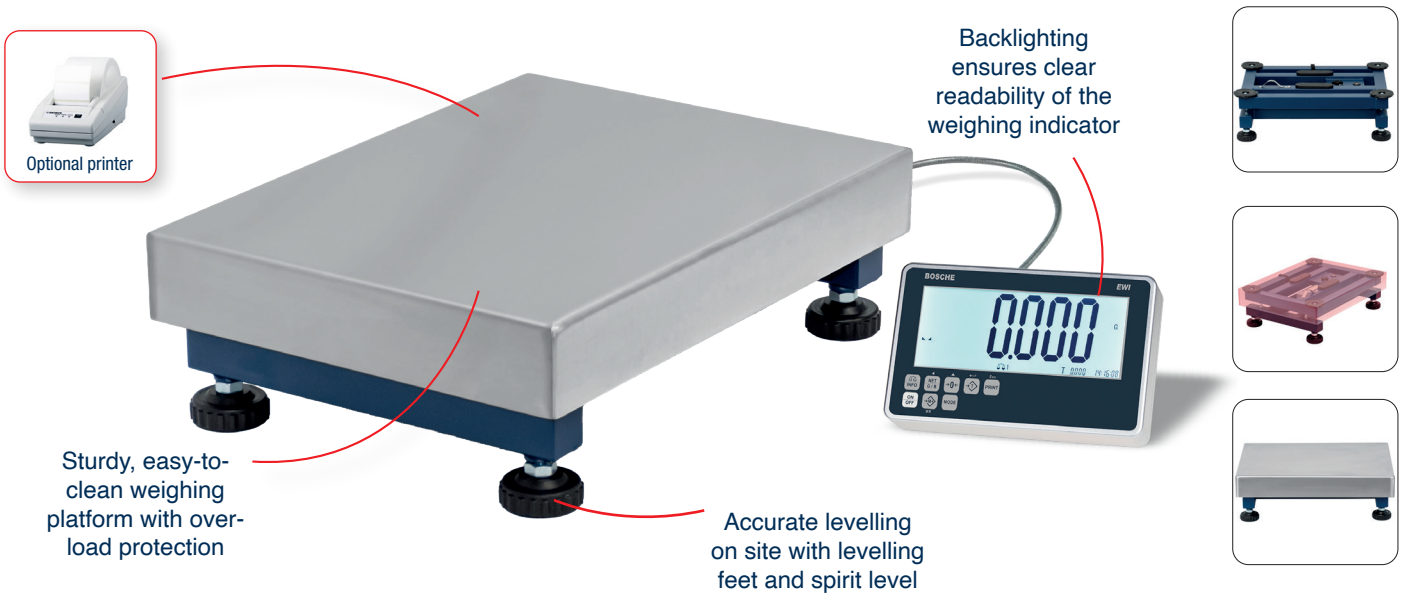

+49 (0) 5491.999.689.0
www.bosche.eu

BOSCHE GmbH & Co. KG
Reselager Rieden 3
49401 Damme