



BOSCHE
WEIGHING SYSTEMS

Floor Scale *FSB E*

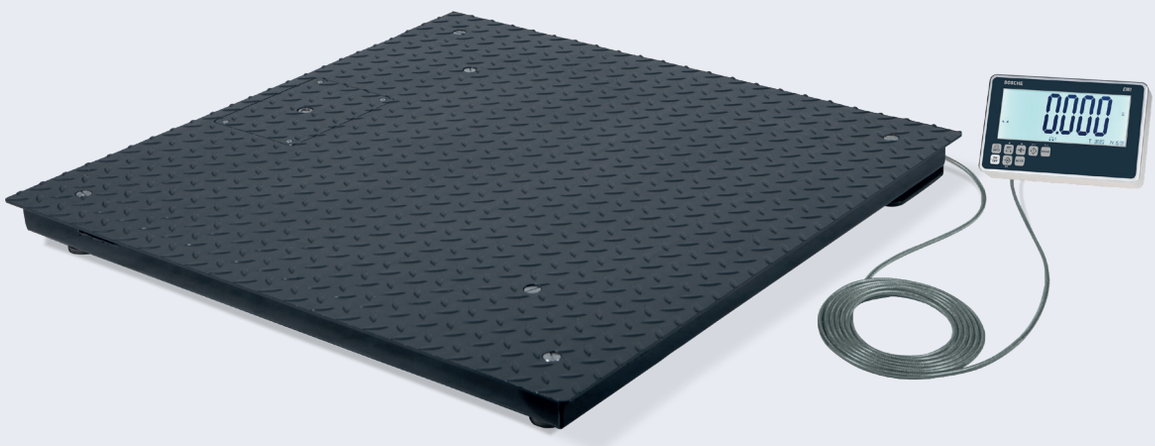







Features

- Robust, low-profile design
- Weighing platform made of powder-coated steel tread plate
- Capacities: 600 kg | 1,500 kg | 3,000 kg
- Standard sizes: 0.8 × 0.8 m | 1 × 1 m | 1.2 × 1.2 m | 1.2 × 1.5 m | 1.5 × 1.5 m | 1.5 × 2 m
- Maintenance- and wear-free weighing technology
- Load cells and cabling protected, integrated within the platform
- Height-adjustable feet and an integrated spirit level for precise leveling
- High-quality M12 industrial connector, securely integrated
- Convenient top access to the junction box and connector
- Installation with ramps or flush-mounted in a pit frame
- Indicator can be separated from the platform, even on legally verified (trade-approved) systems
- EWI-T (legal-for-trade) and GTE-T (non-trade) weighing indicators in an aluminium housing
- Core functions: tare across 100% of capacity, zero, gross/net, manual (keyboard) tare
- Totalisation: memory for number of weighings and accumulated total weight
- Checkweighing via target weight and tolerance limits for setpoint monitoring
- Highly legible 60 mm LCD main display
- Adjustable backlight
- Simple keypad with tactile buttons
- Configurable auto power-off
- Table and wall mounts included as standard
- Adjustable dynamic filter
- Optional RS-232 interface for connecting a printer, handheld scanner, or PC
- Optional rechargeable battery
- Available with a smooth top plate (optional)

+49 (0) 5491.999.689.0
www.bosche.eu

BOSCHE
WEIGHING SYSTEMS

Floor Scale *FSB E*

Heavy-duty floor scales engineered for demanding industrial use. Pair the rugged platform with the EWI-T (trade-approved) or GTE-T (for internal use) indicator for dependable accuracy and intuitive operation. Together they form a low-profile system that installs quickly and delivers reliable results in goods-in, production and dispatch.


The platform is powder-coated steel chequer plate for grip and durability, offered in 0.8 × 0.8 m, 1 × 1 m, 1.2 × 1.2 m, 1.2 × 1.5 m, 1.5 × 1.5 m and 1.5 × 2 m, with standard capacities of 600 kg, 1,500 kg and 3,000 kg. The rigid frame minimises deflection. Four laser-welded, nickel-plated tool-steel load cells (IP68) are integrated into the frame for precise, long-term performance. Installation is flexible: above-floor with or without ramps, or flush in a pit frame to suit space and workflow.

The EWI-T or GTE-T indicator provides clear weight determination and totalisation on a highly legible 60 mm display. The keypad supports zero, gross/net and full-range tare to streamline routine tasks. Supplied for mains operation as standard, the system can be fitted with an optional RS-232 interface to connect a printer, PC or remote display.

To match your process, accessories include ramps or pit frame, second display, printer, RS-232 interface, indicator stand, signal tower with traffic-light function and a rechargeable battery. This modular approach lets you start simple and scale as needs evolve. The FSB E delivers a robust, versatile weighing solution—precise, practical and ready to integrate into any industrial environment.

TECHNICAL DETAILS

Type (with EWI-T, legal-for-trade)	Capacity (max, kg)	Readability, d, e	Platform dimensions
FSB 0808 GTE-T 0600 / FSB 0808 GTE-T 1500 / FSB 0808 GTE-T 3000 FSB 0808 EWI-T 0600 M / FSB 0808 EWI-T 1500 M / FSB 0808 EWI-T 3000 M	600 / 1500 / 3000 600 / 1500 / 3000	100 g / 200 g / 500 g 200 g / 500 g / 1000 g	800 x 800 mm
FSB 1010 GTE-T 0600 / FSB 1010 GTE-T 1500 / FSB 1010 GTE-T 3000 FSB 1010 EWI-T 0600 M / FSB 1010 EWI-T 1500 M / FSB 1010 EWI-T 3000 M	600 / 1500 / 3000 600 / 1500 / 3000	100 g / 200 g /500 g 200 g / 500 g / 1000 g	1000 x 1000 mm
FSB 1212 GTE-T 0600 / FSB 1212 GTE-T 1500 / FSB 1212 GTE-T 3000 FSB 1212 EWI-T 0600 M / FSB 1212 EWI-T 1500 M / FSB 1212 EWI-T 3000 M	600 / 1500 / 3000 600 / 1500 / 3000	100g / 200 g / 500 g 200 g / 500g / 1000 g	1200 x 1200 mm
FSB 1215 GTE-T 0600 / FSB 1215 GTE-T 1500 / FSB 1215 GTE-T 3000 FSB 1215 EWI-T 0600 M / FSB 1215 EWI-T 1500 M / FSB 1215 EWI-T 3000 M	600 / 1500 / 3000 600 / 1500 / 3000	100 g / 200 g / 500 g 200g / 500g / 1000 g	1200 x 1500 mm
FSB 1515 GTE-T 0600 / FSB 1515 GTE-T 1500 / FSB 1515 GTE-T 3000 FSB 1515 EWI-T 0600 M/ FSB 1515 EWI-T 1500 M / FSB 1515 EWI-T 3000 M	600 / 1500 / 3000 600 / 1500 / 3000	100 g / 200 g / 500 g 200 g / 500g / 1000 g	1500 x 1500 mm
FSB 1520 GTE-T 0600 / FSB 1520 GTE-T 1500 / FSB 1520 GTE-T 3000 FSB 1520 EWI-T 0600 M / FSB 1520 EWI-T 1500 M / FSB 1520 EWI-T 3000 M	600 / 1500 / 3000 600 / 1500 / 3000	100 g / 200 g / 500 g 200 g / 500 g / 1000 g	1500 x 2000 mm

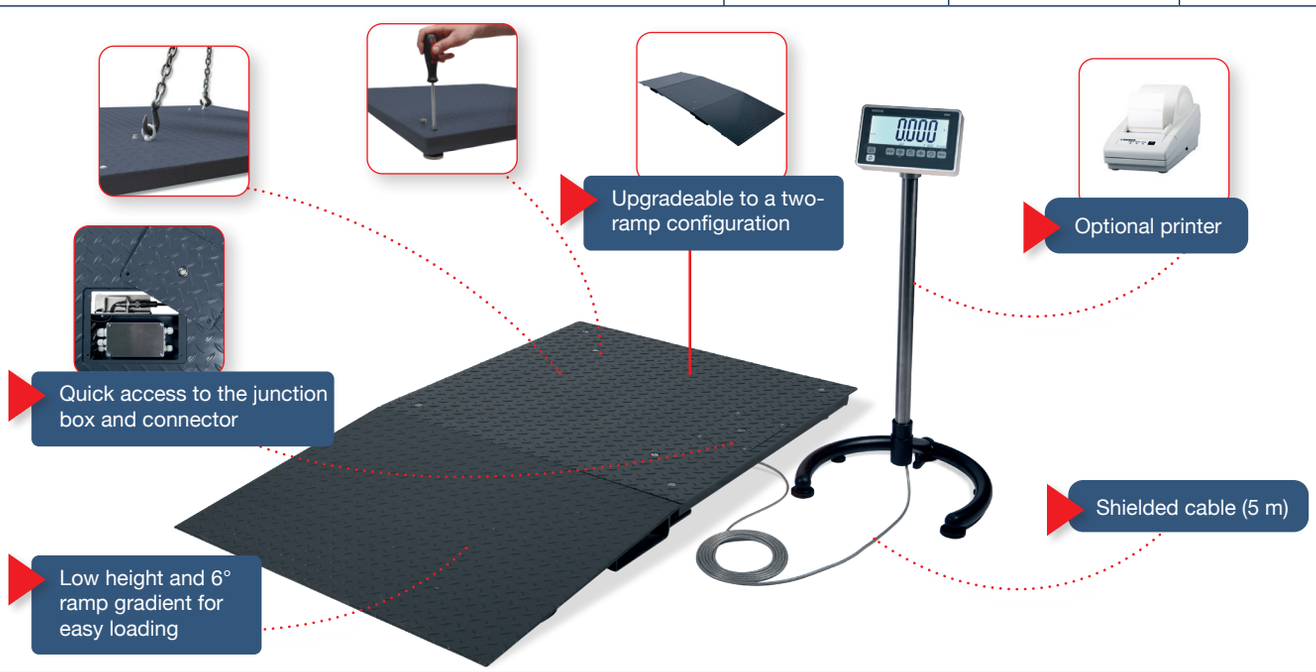

+49 (0) 5491.999.689.0
www.bosche.eu

BOSCHE GmbH & Co. KG
Reselager Rieden 3
49401 Damme